

18" Depth, 6" High	MODEL Stainless	MODEL (Choose Color)
♦ 735± CFM @ 1.5 to 4.6 Sones ♦ 7" Round Duct	N1930BP-SS N1936BP-SS N1942BP-SS N1948BP-SS	N1930BP-BL or WH N1936BP-BL or WH N1942BP-BL or WH N1948BP-BL or WH
♦ 900± CFM @ 1.5 to 4.6 Sones ♦ 8" Round Transition	N1930BP-8-SS N1936BP-8-SS N1942BP-8-SS N1948BP-8-SS	N1930BP-8-BL or WH N1936BP-8-BL or WH N1942BP-8-BL or WH N1948BP-8-BL or WH


FEATURES:

- ♦ 304 Marine Grade Stainless Steel.
- ♦ Variable Controls.
- ♦ Filters: Aluminum Mesh
- ♦ Center Panel Lighting: LED bulb included.
- ♦ Heat Controlled Thermostat, Fire Safety Controlled. Activates at 130 degrees.
- ♦ Electrical: 115 AC, 60 Hz, 9 Amps. For proper installation, unit must be hard wired. Suggested use with 15 Amp Circuit.
- ♦ Suggested Distance Code: 36" above cooking surface.

OPTIONS:

- ♦ Matte Black, additional charge.
Ex: N1930BP-MB (Matte Black)
- ♦ Remote wiring, see accessories.

NO Returns on Matte or RAL colors.

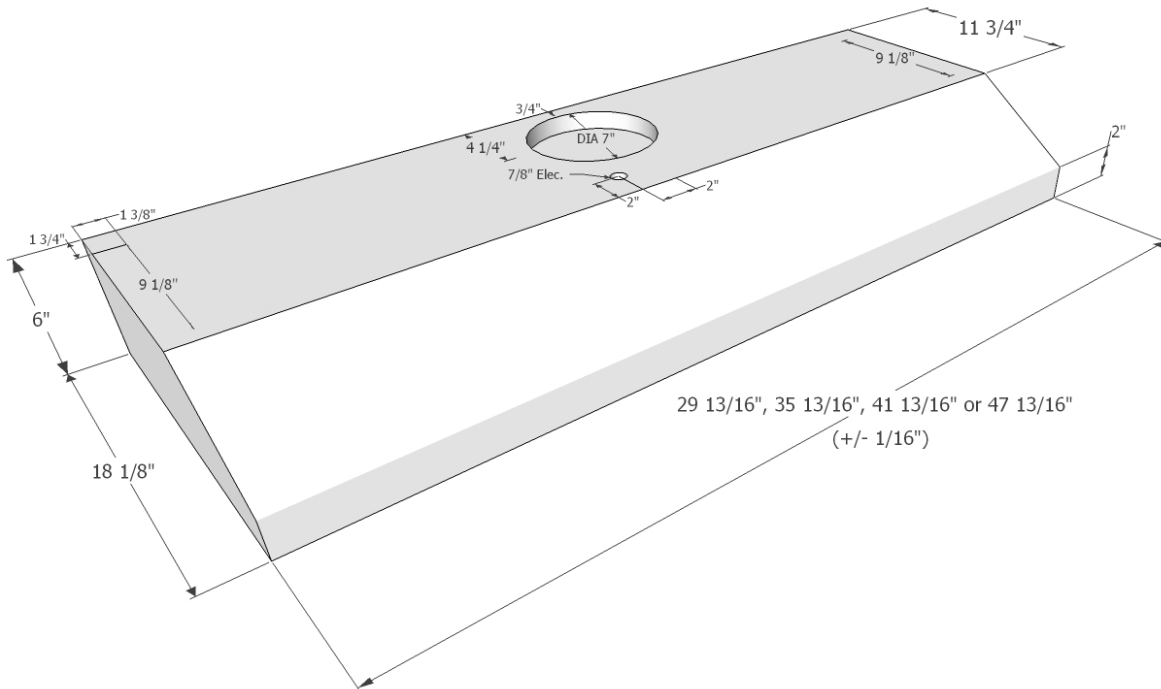

TRANSITION

Example: N1930BP-8-SS
Vent Size 8" Round x 3-1/2" High



SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!

All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.